


CWDM SFP

CWDM SFP support transparent transmission in single-mode dual-fiber of bi-directional data. It is hot-pluggable and suitable for fast Ethernet communication

Feature

- ★ LC optical connectors, support hot-swap
- ★ Complied with ITU-TG957, G958, MSA
- ★ Single 3.3V power supply
- ★ Work wavelength:1270-1510
- ★ Generally compatible
- ★ Metal shell to shield from EMI
- ★ Stable performance

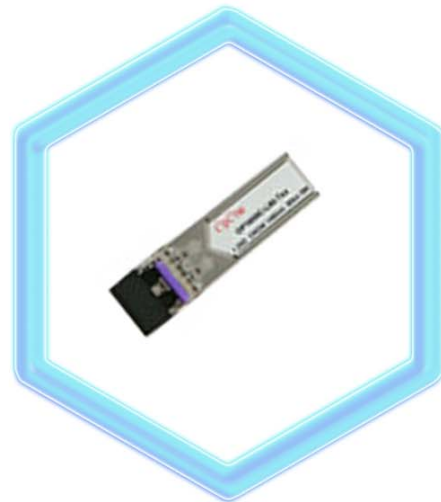

Order information

Model	Rate (bps)	Wavelength (nm)	Mode	Distance	TX (dbm)	RX (dbm)	Connector	Temperature
OP1600C-L80-Txx	1250M	1470-1610	SM	80km	-3~+3	<-25	LC	0~70
OP1600C-L80-Txx	1250M	1270-1450	SM	80km	-3~+3	<-25	LC	0~70
OP1600TA	SFP to 10/100/1000Base-t twisted Pairs 100m						RJ-45	0~70

OP1600TA

